

# Control Cabinet Top



Ref.Nº: 1091

Pieces	2
Manufacturer	Suzlon Energy LTD
Type	2.1 Mw SCS STV Control Panel
Rate Power	3 x 690V
Frequency	50 Hz
Year	2006
Condition	Used
Location	Portugal
Availability	12-2025

Price: 22.150.-€ per piece / Loaded on Truck

**Typ: Crowbarsteuerung 1200V-BOD**

**Art.Nr: LPG-0190**

**SAP-Nr.: 3EGH000035-2329**

**Schaltung: Steuerelektronik**

**U-Zünd: 1200V+/-50V oder extern 24V**

**Ser.Nr.: 20000841-0906016**

**Leistungselektronik GmbH**

**D-68307 Mannheim, Tel.: 0621/78992-0**



WA-Nr. 6880726 003

Fabrikat.-Nr.

00036

ES

5865.009



Openings in this enclosure must be covered with closure plates, systems or conduits with the same type rating as this enclosure

## BOMBARDIER

DC- chopper	
Identity number	3EGH000035-2249
Serial number	48509 08/06
Input voltage	max. 670V 3AC
Input current	500A 3AC
Switching frequency	750Hz
Auxiliary power	24V DC +10% / max. 3A
	230V AC +10% / max. 6A
Protection degree	IP44
Weight	304 kg

ÄM 35469

SEL/1011/513/00004

QUINT POWER  
PHENIX CONTACT  
3A1  
Output DC 24V 10A  
DC OK  
Adjust 22.5-28.5V  
Input AC 100-240V  
M L

QUINT POWER  
PHENIX CONTACT  
3A2  
Output DC 24V 20A  
DC OK  
Adjust 22.5-28.5V 13-14  
Input AC 100-240V  
M L

PHENIX CONTACT  
3A1  
Output DC 24V 10A  
DC OK  
Adjust 22.5-28.5V  
Input AC 100-240V  
M L

PHENIX CONTACT  
3A2  
Output DC 24V 20A  
DC OK  
Adjust 22.5-28.5V 13-14  
Input AC 100-240V  
M L

15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200

IMPORTANT  
This unit is connected  
power from the air  
switches with fuses  
etc. when









Adjust  
22.5-28.5V

13-14  
OK

Output DC 24V 20A

DC OK


PHGENIX  
CONTACT  
3A2


**Powertronic GmbH & Co.KG** D-32278 Kirchlangern  
Power supply | Charger  
Type P 688W  
F.-Nr. 11 05 6905 | 90.236  
Eini In 185-264 V AC, 40 - 70Hz, max. 1130VA, 790W  
Ausl Out 300V DC, 2,1 A DC at TA -30°C up to +40°C  
Alarm contact 220 V DC | 60Watt

UL LISTED  
CONFORMS TO  
UL STD 508  
Intertek  
3101374  
CERTIFIED TO  
CSA STD C22.2 NO. 14

OPERATION



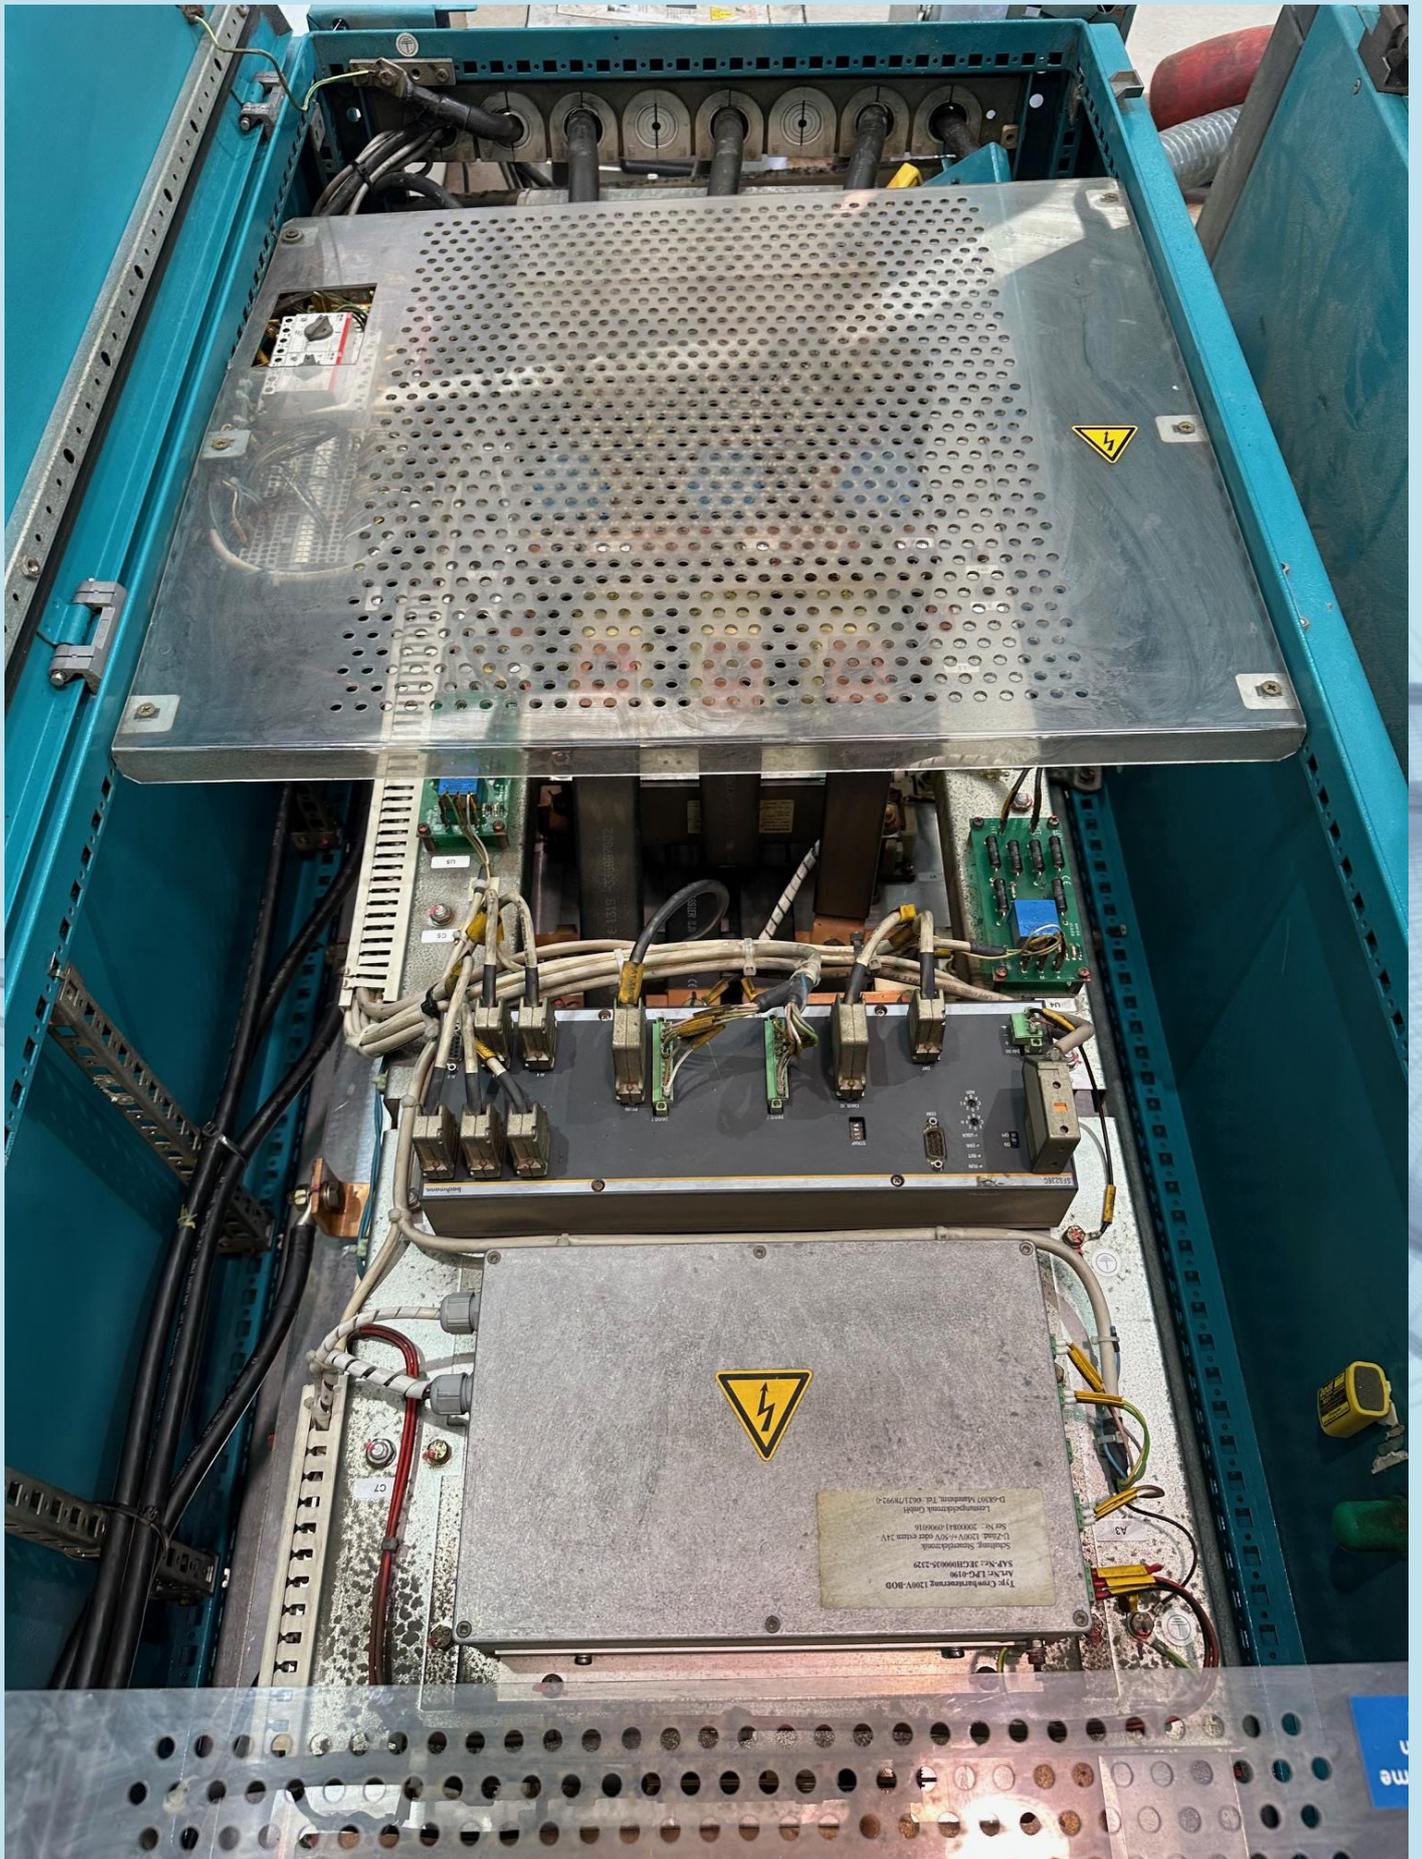

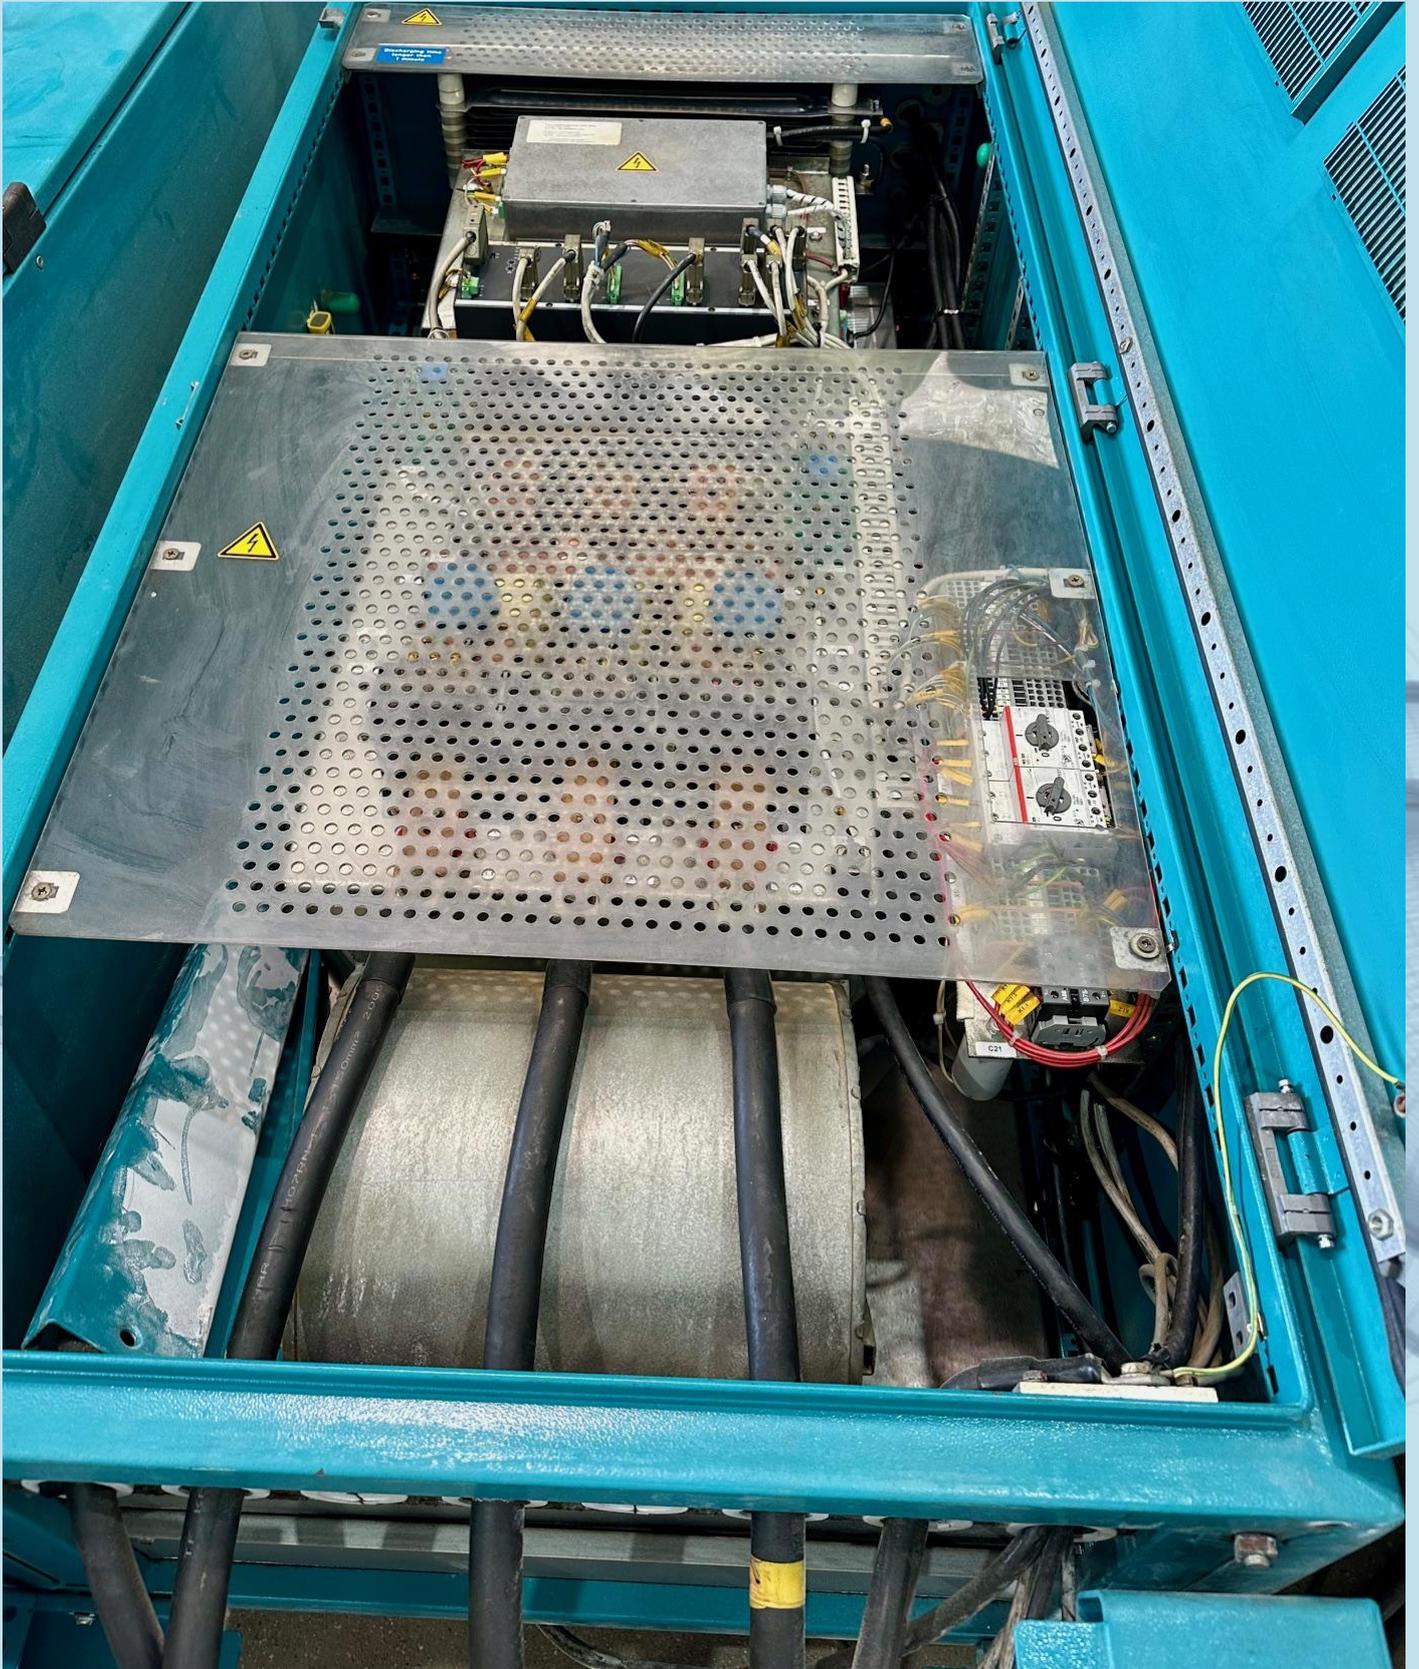



BOMBARDIER  
TRANSPORTATION

IMPORTANT  
DO NOT USE THIS PART IN  
ANY OTHER APPLICATION  
UNLESS SPECIFICALLY  
APPROVED BY THE  
MANUFACTURER



